



Mini-Circuits

SURFACE MOUNT

Power Splitter/Combiner **SYPS-3-182-75+**

3 Way-0° 75Ω 5 to 1800 MHz

THE BIG DEAL

- Wideband, 5 to 1800 MHz
- Low insertion loss, 2.5 dB
- Good return loss, 20 dB typ.
- Low amplitude unbalance, 0.4 dB typ.
- Low phase unbalance, 2.0 deg. typ.



Generic photo used for illustration purposes only

CASE STYLE: AH202

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- CATV
- DOCSIS® 4.0 system

PRODUCT OVERVIEW

Mini-Circuits' SYPS-3-182-75+ is a 75Ω 3-way 0° surface mount splitter/combiner covering the 5 to 1800 MHz frequency range, supporting bandwidth requirements for DOCSIS® 4.0 systems and equipment as well as other broadband applications. This model can handle up to 1W RF input power as a splitter and provides low insertion loss, high isolation, and low phase and amplitude unbalance. It comes housed in a miniature, 8-lead plastic package (0.38 x 0.50 x 0.25") with wrap-around terminations for excellent solderability and gold over nickel plate termination finish.

KEY FEATURES

Feature	Advantages
Wideband, 5 to 1800 MHz	Suitable for many broadband applications including DOCSIS® 4.0 systems and equipment.
Low insertion loss, 2.5 dB	The combination of 1W power handling and low insertion loss makes this model a suitable candidate for distributing signals while maintaining signal power.
Low unbalance: • 0.4 dB amplitude unbalance • 2.0° phase unbalance	SYPS-3-182-75+ produces nearly equal output signals, ideal for parallel path / multichannel systems.
Good isolation, 20 dB typ.	Minimizes interference between input ports.
Good Return Loss, 20 dB typ.	Provides excellent thru-path transmission with low signal reflection.





Mini-Circuits®

SURFACE MOUNT

Power Splitter/Combiner **SYPS-3-182-75+**

3 Way-0° 75Ω 5 to 1800 MHz

ELECTRICAL SPECIFICATIONS AT +25°C


Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		5		1800	MHz
Insertion Loss, above 4.8 dB	5-50	—	0.6	1.1	dB
	50-1220	—	1.2	1.9	
	1220-1800	—	2.5	4.5	
Isolation	5-50	23	27	—	dB
	50-1220	15	20	—	
	1220-1800	12	16	—	
Phase Unbalance	5-870	—	1.5	5.0	Degree
	870-1800	—	5.0	12	
Amplitude Unbalance	5-50	—	0.2	0.40	dB
	50-1220	—	0.4	0.60	
	1220-1800	—	0.7	1.50	
Return Loss (Port S)	5-50	—	18	—	dB
	50-1220	—	20	—	
	1220-1800	—	16	—	
RET LOSS (Port 1 to Port 3)	5-50	—	18	—	dB
	50-1220	—	20	—	
	1220-1800	—	16	—	

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C
Power Input (as a splitter)	1 W max.
Internal Dissipation	0.15 W max.

Permanent damage may occur if any of these limits are exceeded.

ELECTRICAL SCHEMATIC

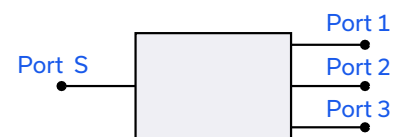



Mini-Circuits

SURFACE MOUNT

Power Splitter/Combiner **SYPS-3-182-75+**


3 Way-0° 75Ω 5 to 1800 MHz

PIN CONNECTIONS

SUM PORT	8
PORT 1	1
PORT 2	4
PORT 3	5
GROUND	2,3,6,7

PRODUCT MARKING: N/A

DEMO BOARD MCL P/N: TB-SYPS3182-75+
SUGGESTED PCB LAYOUT (PL-229)

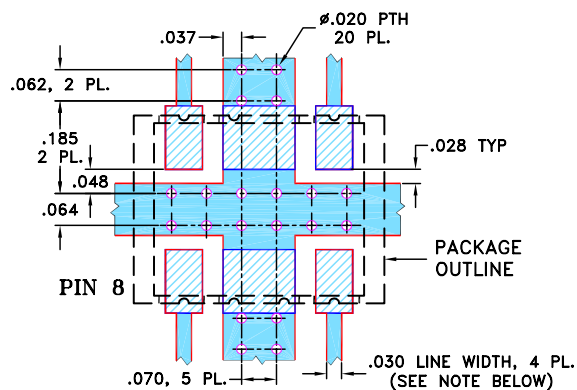


NOTE:

- TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
- BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

	DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
	DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DRAWING

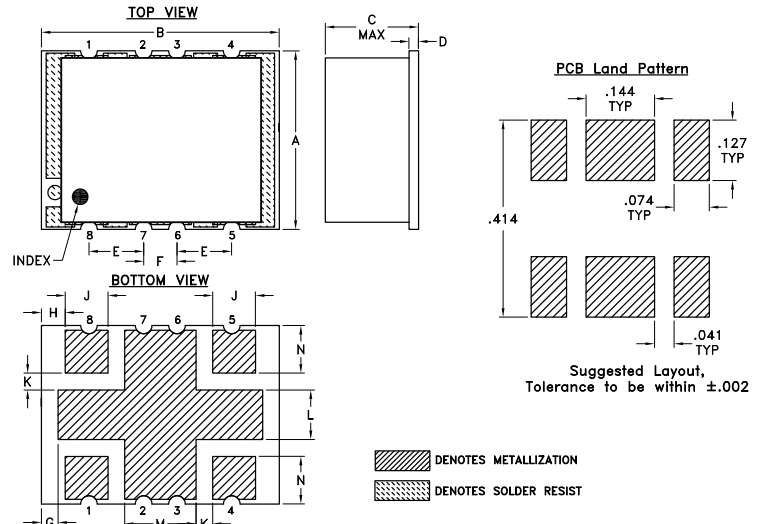

OUTLINE DIMENSIONS (Inches mm)

A	B	C	D	E	F	G	H
.38	.50	.25	.020	.115	.070	.035	.050
9.65	12.70	6.35	0.51	2.92	1.78	0.89	1.27
J	K	L	M	N			wt
.090	.040	.105	.140	.095			grams
2.29	1.02	2.67	3.56	2.41			0.80

TAPE & REEL INFORMATION: F61










Mini-Circuits

SURFACE MOUNT

Power Splitter/Combiner **SYPS-3-182-75+**

3 Way-0° 75Ω 5 to 1800 MHz

TYPICAL PERFORMANCE DATA

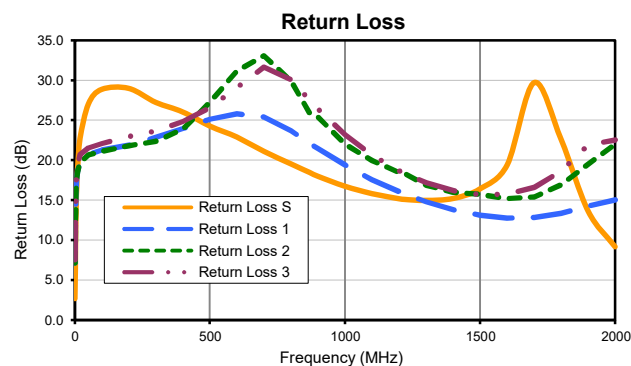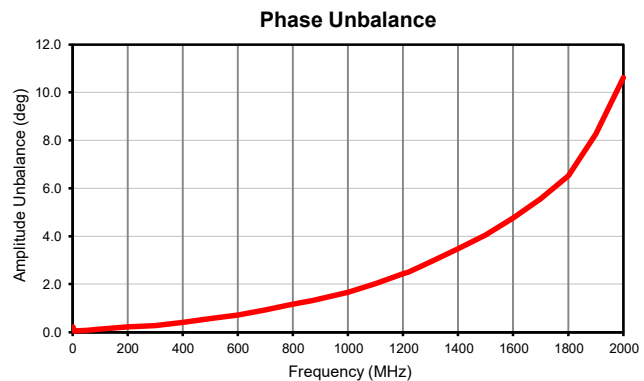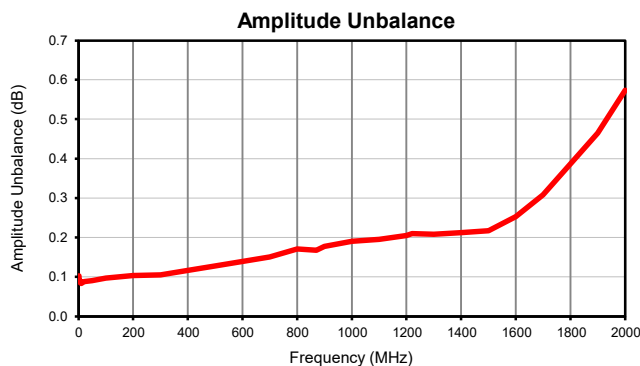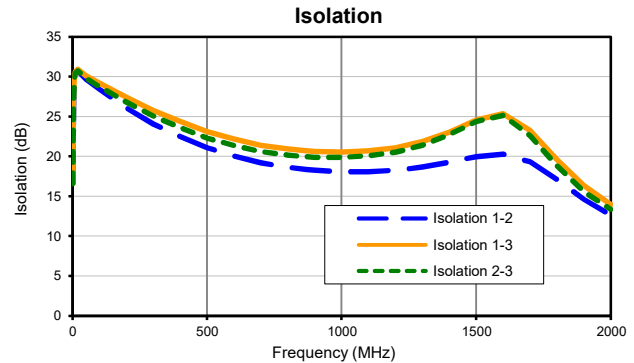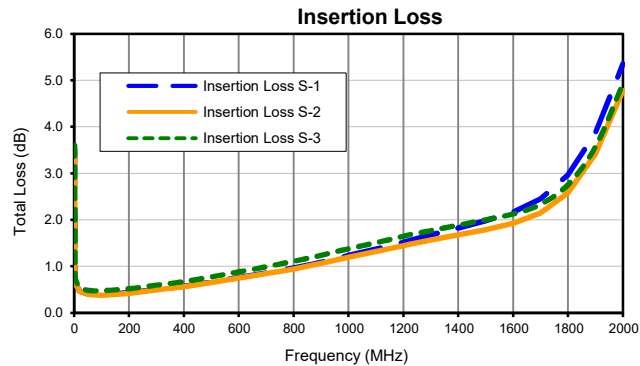

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[SYPS-3-182-75+](#)