


- CABLE DIAMETER : 6.50mm±0.19 PIN DUT :

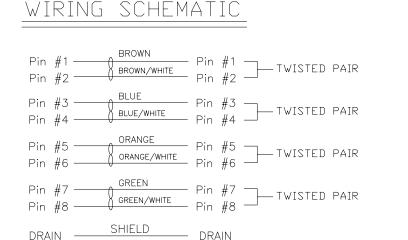

CCA-000-MYYR197 02 = 2 METERS03 = 3 MFTFRS**SEE PAGE 4 FOR CABLE

SPECIFICATIONS

UNITS = "as indicated"

DO NOT SCALE FROM DRAWING




DRAWN: M. SIGMON DATE: 04-22-15


NorComp

	_	SHEET
	NTS	1
)	DWG NO	

CCA-000-MYYR197

REV



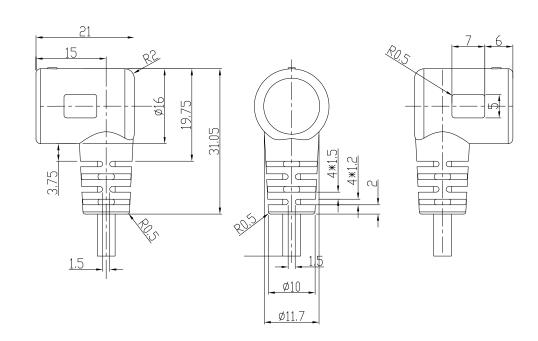

ROHS COMPLIANT

UNITS = mm

04-22-15

DO NOT SCALE FROM DRAWING




THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF ADDAPATIS WITHOLIT WRITTEN PERMISSION


AWN:	DATE:
M. SIGMON	

NorComp

SCALE:	SHEET		OF		REV
NTS		2		4	4
DWG NO.	CCA-	00	0-N	1YYR197	

DESCRIPTION: M12 - MALE RIGHT ANGLE TO STRAIGHT - 8 POSITION - CABLE ASSEMBLY

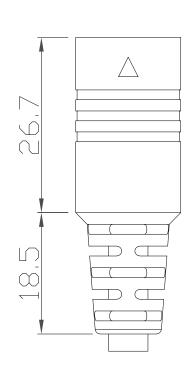

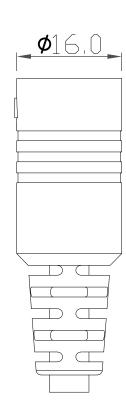

ROHS COMPLIANT

UNITS = mm

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE
THE PROPERTY OF NOrComp AND SHALL NOT
BE REPRODUCED, COPIED OR USED AS THE
BASIS FOR THE MANUFACTURE OR SALE OF
APPARATUS WITHOUT WRITTEN PERMISSION

DRAWN:
M. SIGMON

DATE: 04-22-15

NorComp DWG NO.

SCALE:	SHEET		OF	
NTS		3		4

CCA-000-MYYR197

REV




ELECTRICAL CHARACTERISTICS

VOLTAGE RATING: 30V TEMPERATURE RATING: 60°C

SPARK TEST: AC-2000V/0.15 sec MIN.
DIELECTRIC STRENGTH: AC-750V/1 sec MIN.

INSULATION RESISTANCE: PE: DC-500V 15000 MOHM/100M MIN. AT 20°C

CONDUCTOR RESISTANCE: 24AWG - 93.2 OHM/KM MAX. AT 20°C

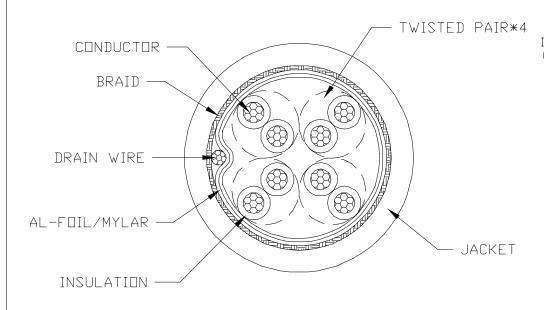

4 1 3 2

COLOR CODE

- 1. BROWN * BROWN/WHITE
- 2. BLUE * BLUE/WHITE
- 3. DRANGE * DRANGE/WHITE
- 4. GREEN * GREEN/WHITE

ROHS COMPLIANT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: D
M. SIGMON

DATE: 04-22-15

NorComp

	SCALE:
`	NT:
J	DWG NO.

SHEET 4

4

REV

CCA-000-MYYR197