

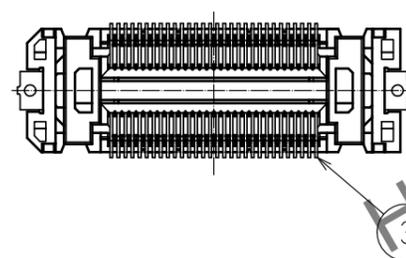
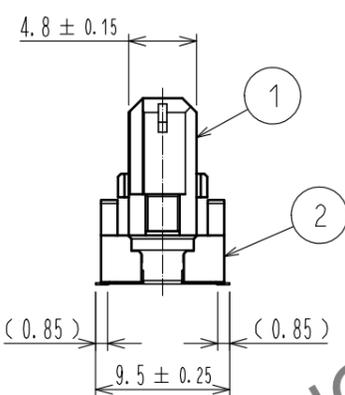
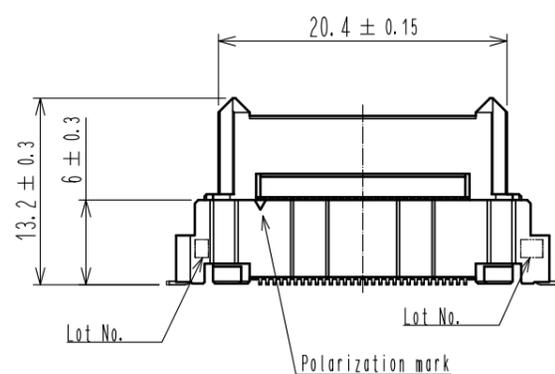


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

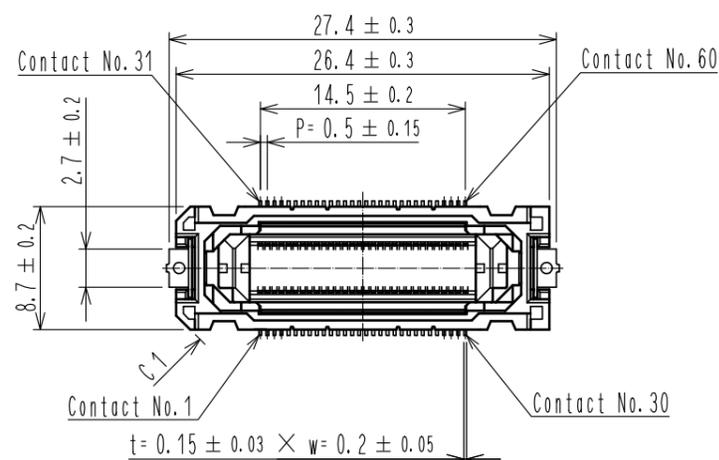



RECOMMENDED LAND PATTERN DIMENSION OF PCB

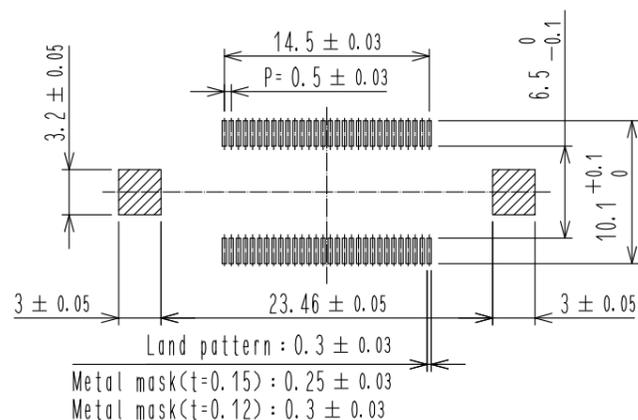


FLOATING RANGE

Y direction : ±0.6mm


X direction : ±0.6mm

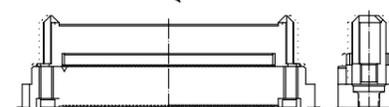

CROSS SECTION OF MATING (No scale)

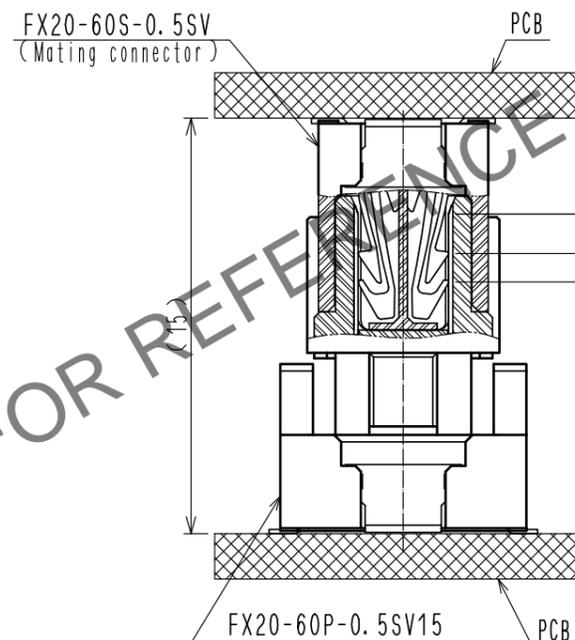


CROSS SECTION OF MATING (No scale)

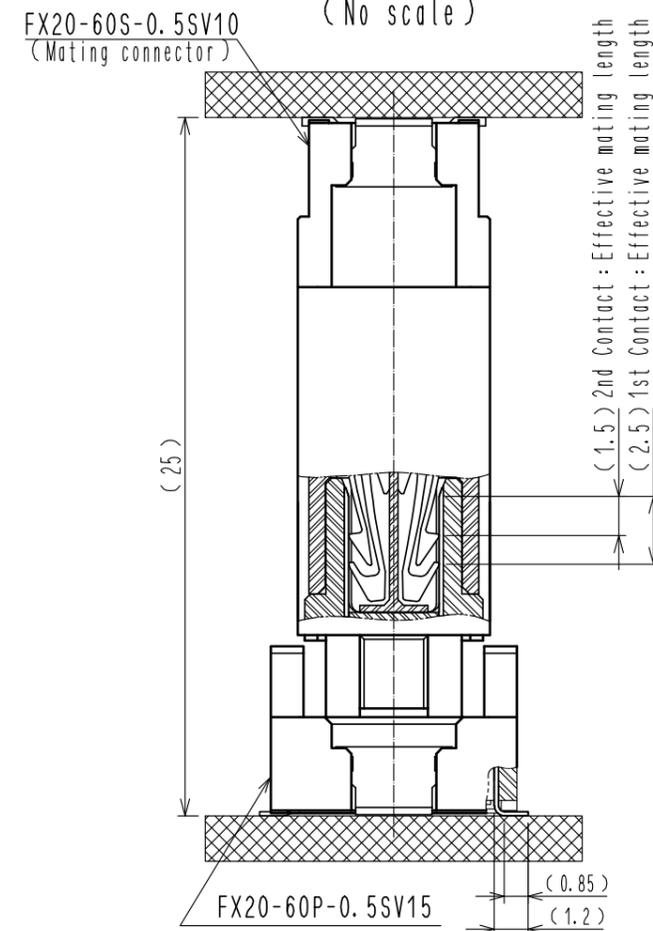

- 1 Lead CO-Planarity is 0.1mm MAX.
- 2 This is packaged in embossed carrier tape. (260pcs/RL)
- 3 Floating range of this connector is ±0.6mm MAX.
- 4 Blemish and hit mark can be occurred through out the manufacturing process which dosen't affect quality level.
- 5 Please note that excessive wrenching force could damage this connector. Please refer to the guideline for detailed regulations of the mating method.
- 6 The dimensions in parentheses are for references.

2	POLYAMIDE	BLACK UL94V-0	3	COPPER ALLOY	CONTACT AREA:GOLD 0.1 μm LEAD AREA:GOLD 0.03 μm UNDER PLATING:NICKEL 1 μm
1	POLYAMIDE	BLACK UL94V-0	6	POLYESTER	(EMBOSSED COVER TAPE)
			5	POLYSTYRENE	(EMBOSSED CARRIER TAPE)
			4	BRASS	TIN-PLATING 1 μm
NO. MATERIAL FINISH . REMARKS		NO. MATERIAL FINISH . REMARKS			
UNITS mm		SCALE 2 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED
APPROVED : HT. YAMAGUCHI		20200820			
CHECKED : HT. YAMAGUCHI		20200820			
DESIGNED : KS. NAKAJIMA		20200820			
DRAWN : KS. NAKAJIMA		20200820			
DRAWING NO. EDC-336320-20-00			PART NO. FX20-60P-0.5SV15(20)		
CODE NO. CL570-1002-3-20			DATE		

Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

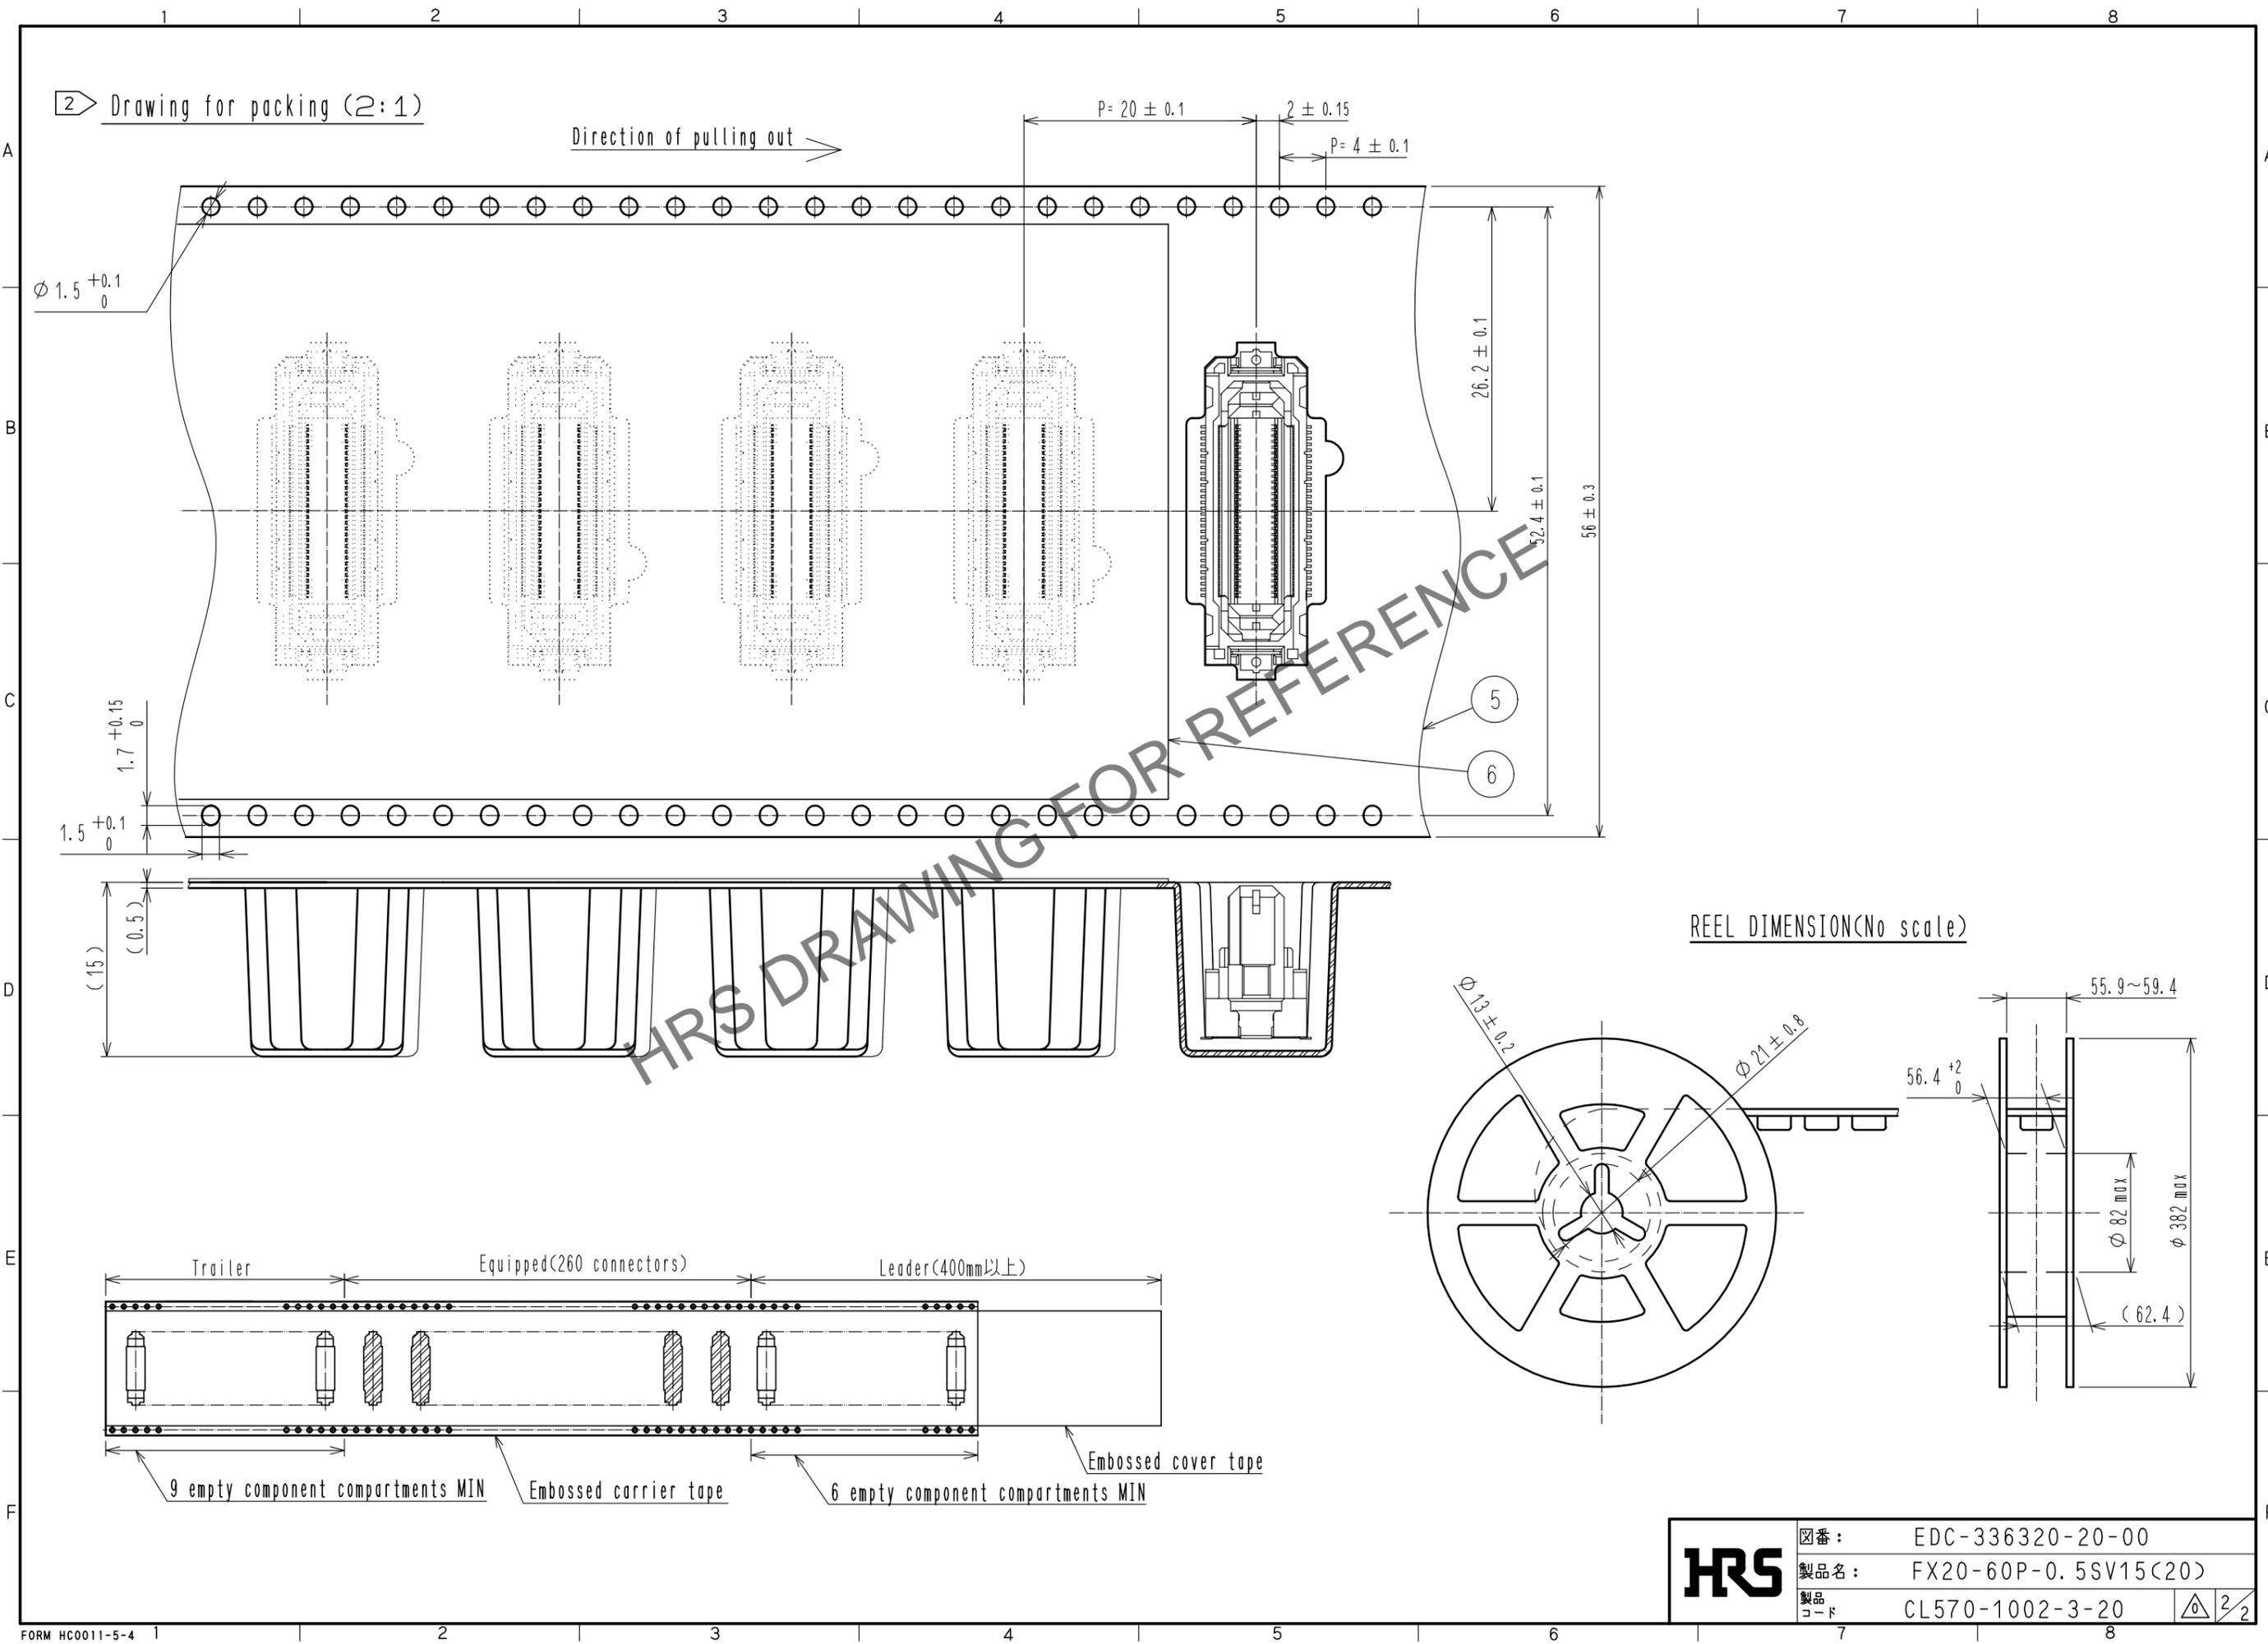

HRS	図番:	EDC-336320-20-00	2/2
	製品名:	FX20-60P-0.5SV15(20)	
	製品コード:	CL570-1002-3-20	