


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

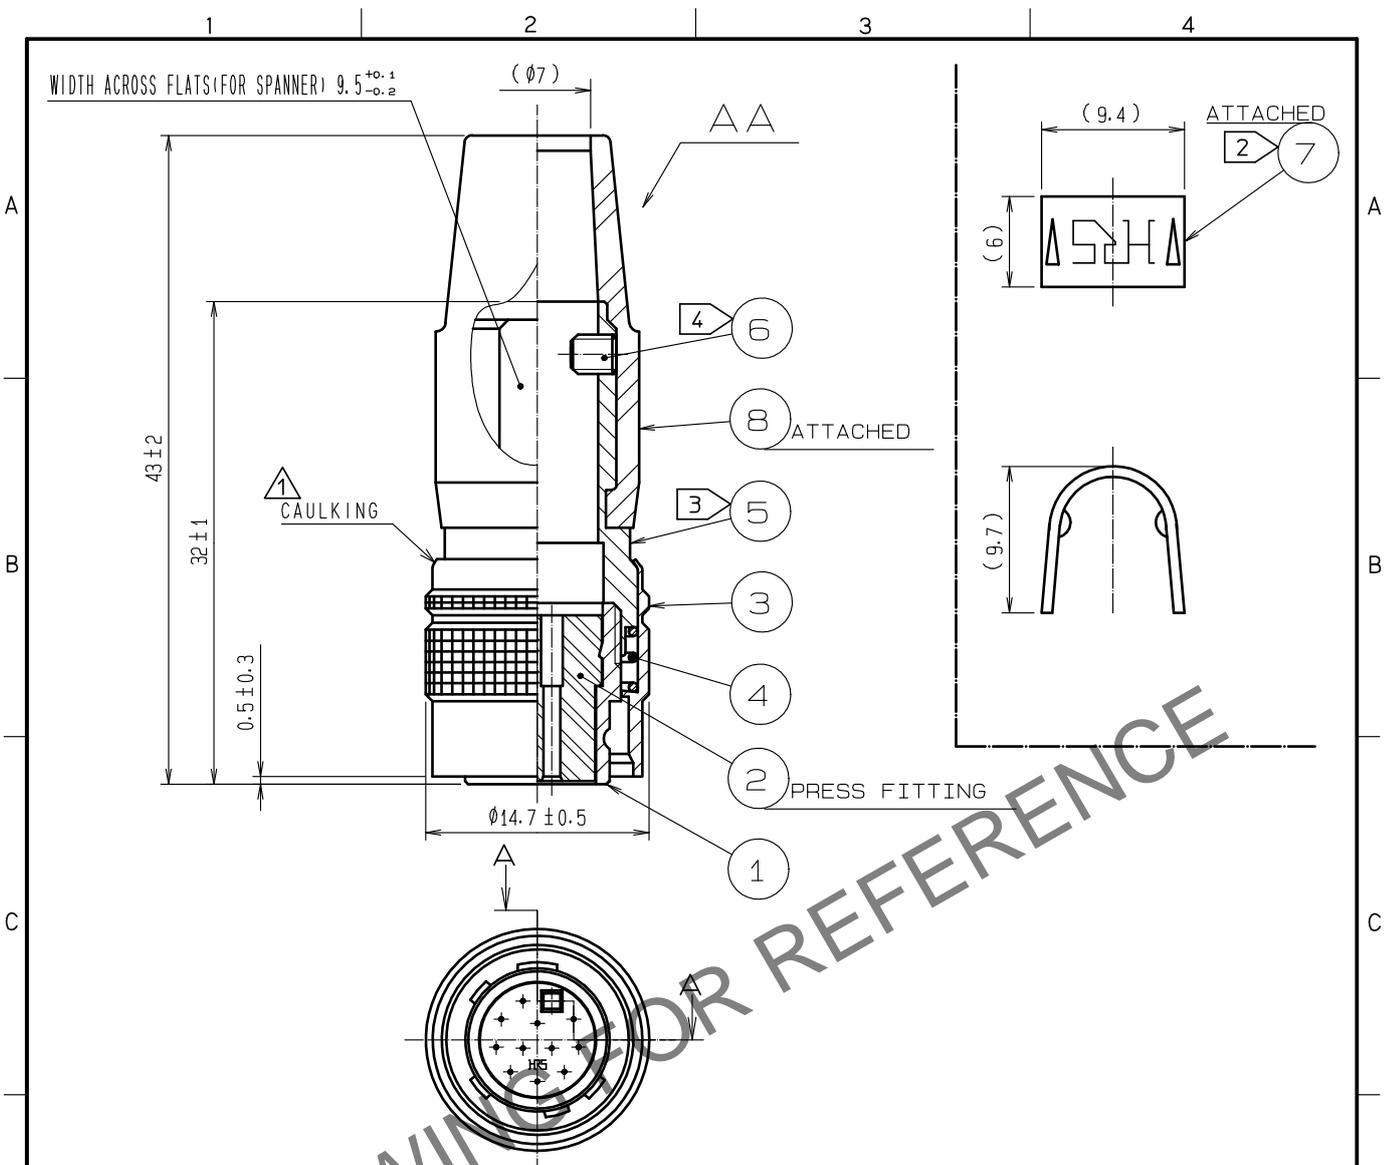

NOTES 1. APPLICABLE CRIMP CONTACT :HR12-SC-212
 (APPLICABLE CABLE:26-30AWG. (JACKET DIAMETER φ1 MAX))
 APPLICABLE CRIMP CONTACT EXTRACTION TOOL:HR12-SC-TP
 2 HAND CRIMPING TOOL. REF. NO.⑦ :HR10A-TC-02
 3 THE RECOMMENDED CLAMP TORQUE . REF. NO.⑤ :2 TO 2.5N·m.
 ② LOCTITE 263, LOCTITE JAPAN OR EQUIVALENT APPLIES TO PREVENT REF. NO. ⑤ FOR LOOSEING.
 ④ ACROSS FLATS OF HEXAGON HOLE OF REF. NO.⑥ TO BE 1.27.
 APPLICABLE DRIVER:PB205/1.27.
 THE RECOMMENDED CLAMP TORQUE. REF. NO.⑥ :0.3 TO 0.4N·m.
 ② LOCTITE263, HENKEL JAPAN OR EQUIVALENT APPLIES TO PREVENT REF. NO. ⑥ FOR LOOSENING.
 5 ROTATION EXAMPLES OF REF. NO.① AND ⑤ ARE SHOWN.
 6 THE CABLE PULL AND TWISTING STRENGTH AND OTHER CHARACTERISTICS MAY DIFFER,
 DEPENDING ON THE CABLE STRUCTURE.
 PLEASE CONFIRM BEFORE THE USE.
 ⑦ THE ASSEMBLY THIS PRODUCT APPLIES TO THE MANUAL ETAD-C0354-00.

4	STEEL	NICKEL PLATING	8	CHLOROPRENE RUBBER	(BLACK)
3	BRASS	MATTE FINISH NICKEL PLATED	7	BRASS	
2	POLYBUTYLENE TEREPHTHALATE	(BLACK) UL94V-0	6	STEEL	NICKEL PLATING M2.6X0.45X3
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	5	BRASS	NICKEL PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1	COUNT ③ 3	DESCRIPTION OF REVISIONS DIS-C-00017346	DESIGNED HT. ZENBA	CHECKED HY. KOBAYASHI	DATE 20240508
HRS HIROSE ELECTRIC CO., LTD. APPROVED :MO. SATOH 20061027 CHECKED :EJ. KUNII 20061027 DESIGNED :TP. KOMATSU 20061027 DRAWN :MK. SATO 20061027				DRAWING NO. EDC4-025180-73 PART NO. HR10A-10P-12SC(73) CODE NO. CL0110-0604-4-73			