


Feb. 1. 2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1			2			3			4					
COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
1	DIS-C-000585	T.K	E.K	07.07.27										

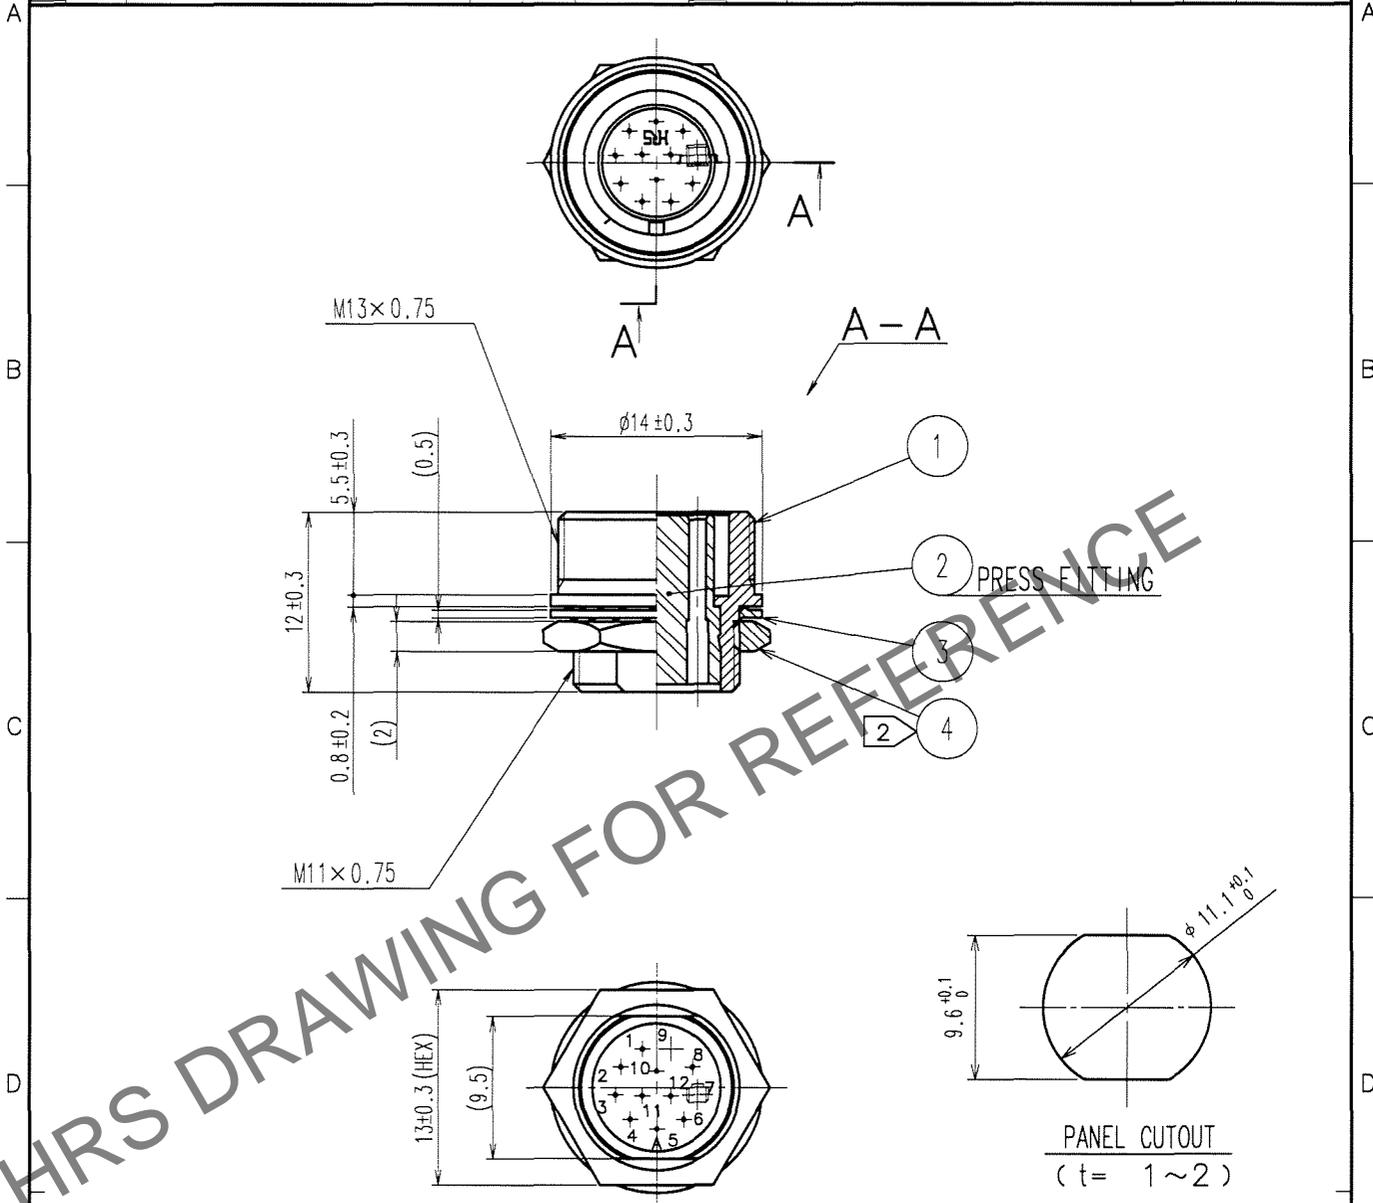

NOTE 1 APPLICABLE CRIMP CONTACT: HR12-SC-212 (CL112-0408-9)
(WIRE RANGE: AWG#26 TO 30
JACKET DIAMETER: ϕ 1 MAX)
APPLICABLE CRIMP CONTACT EXTRACTION TOOL:
HR12-SC-TP (CL112-0050-3)
② THE RECOMMENDED CLAMP TORQUE, REF. NO. ④ : 2N · m.
LOCTITE 242, HENKEL OR EQUIVALENT IS RECOMMENDED TO PREVENT REF. NO. ④ FROM LOOSENING.

2	POLYBUTYLENE TEREPHTHALATE (BLACK)	UL94V-0	4	BRASS ①	NICKEL PLATING
1	BRASS	NICKEL PLATING	3	PHOSPHOR BRONZE	NICKEL PLATING
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)	CL	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
		M.SATO	T.KOMATSU	E.KUNII	M.SATO	
		'06 10 03	'06 10 04	'06 10 04	'06 10 06	

 SCALE 2 : 1 UNITS mm	DRAWING NO. EDC4-043235-73	PART NO. HR10A-10TR-12SC(73)
	 HIROSE ELECTRIC CO., LTD.	CODE NO. CL110-0456-9-73

TO
R