





Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

A
Detail of mounting guide

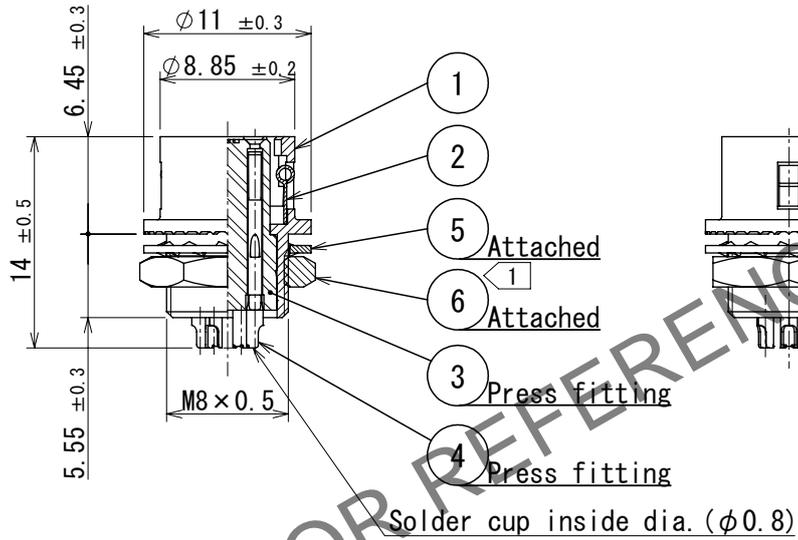

Panel cutout
t=0.7 to 2

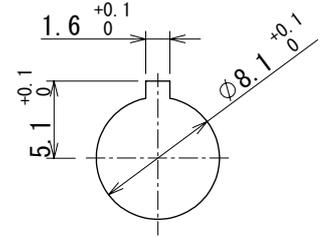

△ Note ① The recommended clamp torque, Ref.No. ⑥: 1.5N · m.
Loctite 243, Henkel Japan or equivalent apply to prevent Ref.No. ⑥ for loosening.

△ CAD change

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
3	Polyamide	(Black)	UL94V-0	6	Brass		Nickel plating
2	Stainless steel			5	Phosphor bronze		Nickel plating
1	Zinc alloy	Matte finish nickel plated		4	Phosphor bronze		Silver plating 2μm min.

	UNITS mm		SCALE 2:1	COUNT 2	DESCRIPTION OF REVISIONS DIS-C-00020597	DESIGNED TY. SUZUKI	CHECKED HY. KOBAYASHI	DATE 2025. 09. 05	APPROVED : MO. SATOH 2007. 03. 28	DRAWING NO. EDC-042708-73-73
									CHECKED : E.J. KUNII 2007. 03. 28	
DESIGNED : TO. HORII 2007. 03. 27						CODE NO. CL0110-1605-2-73		① 1/1		
DRAWN : MK. SATO 2007. 03. 24										