



Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

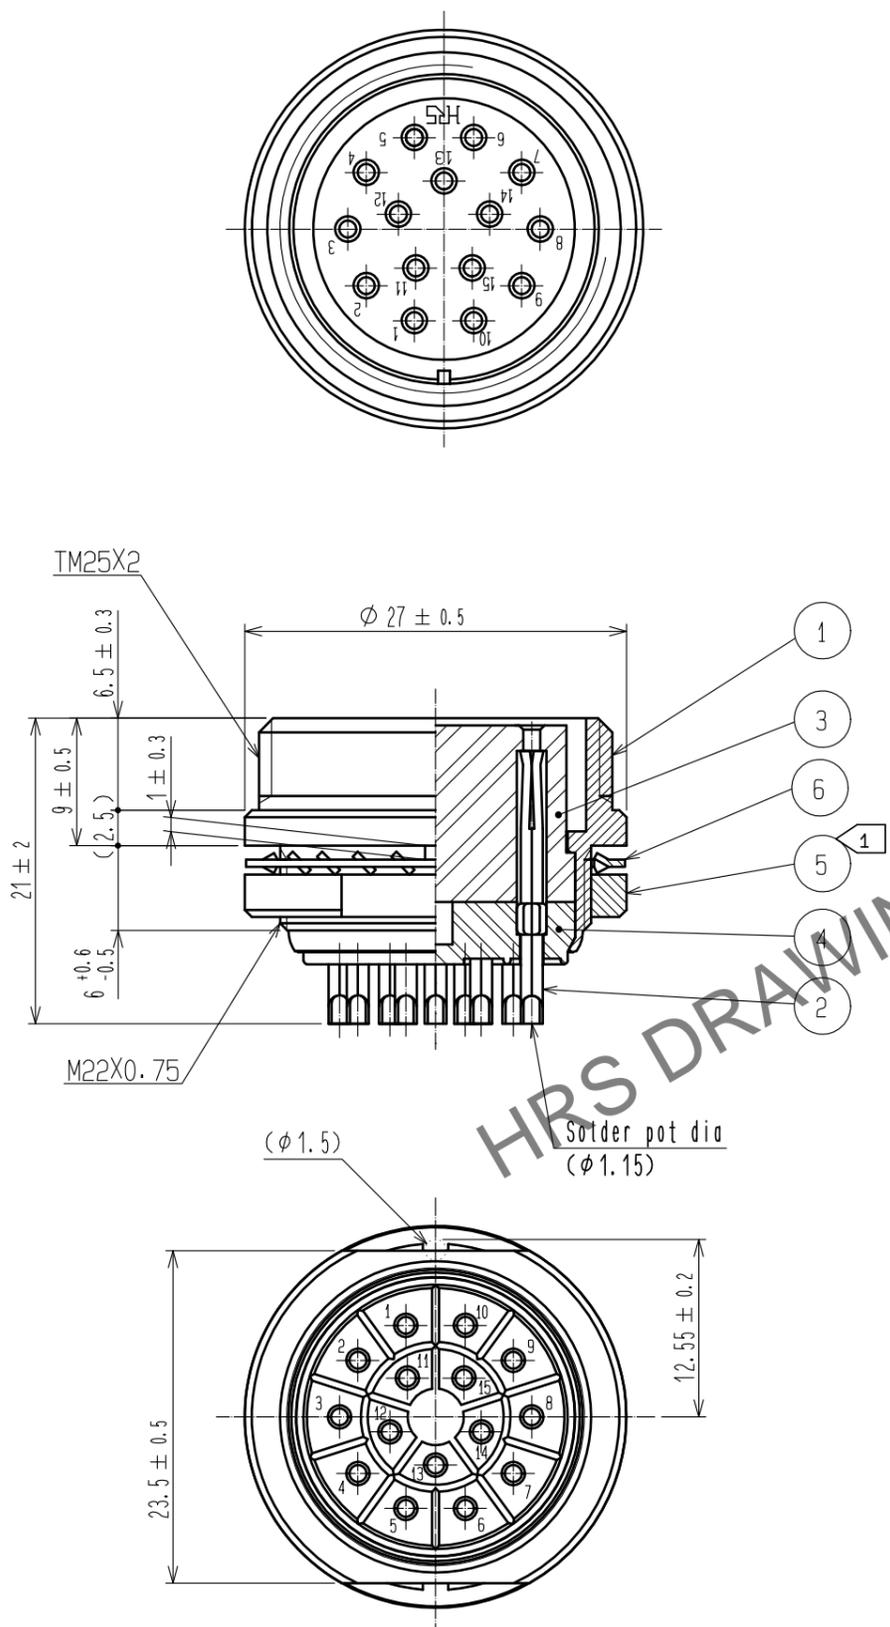

Panel cutout
 (Panel thickness 2 max.)

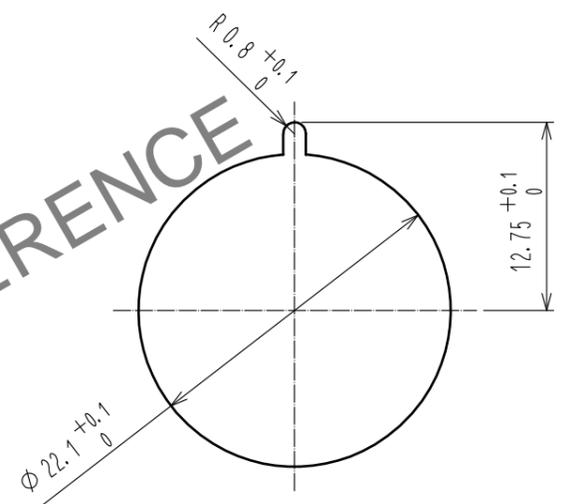

HRS DRAWING FOR REFERENCE

Note 1 The recommended tighten torque of ref. No. 5 to be 4 N·m.
 LOCTITE 243, HENKEL JAPAN or equivalent is recommended to prevent ret. No. 5 from loosening.

3	PPS	(BLACK) UL94V-0	6	PHOSPHOR BRONZE	NICKEL PLATING
2	COPPER ALLOY	SILVER PLATING 5μm min.	5	BRASS	NICKEL PLATING
1	BRASS	NICKEL PLATING	4	PPS	(BLACK) UL94V-0
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : SU. OBARA	15.10.26	DRAWING NO.	EDC-003738-81-00		
		CHECKED : HY. KOBAYASHI	15.10.26	PART NO.	RM21TR-15S(81)		
		DESIGNED : KN. IKEHARA	15.10.26	CODE NO.	CL109-0327-6-81		
		DRAWN : KN. IKEHARA	15.10.26				