


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



- NOTE 1 LEAD CO-PLANARITY IS 0.1mm MAX.
- ② CONTACTS ARE 3 STEPS SEQUENTIAL. (MF CONTACT A=>SIGNAL CONTACT=>MF CONTACT B)  
WHEN USING THIS SEQUENTIAL STRUCTURE, PLEASE AVOID ANGLED INSERTION.
- 3 MF CONTACT A AND MF CONTACT B CAN BE USED AS POWER SUPPLY CONTACT. (3A/PIN MAX)
- ④ IT SHOWS THE VACUUM PICKUP AREA. (SEE PAGE 2)  
REMOVE THE MYLAR TAPE BEFORE MATING CONNECTORS.
- ⑤ PACKING FOR PRODUCT APPLIES EMBOSSED CARRIER TAPE PACKING. (400pcs/RL)
- 6 BLEMISH AND HIT MARK CAN BE OCCURED THROUGH OUT THE MANUFACTURING PROCESS WHICH DOESN' T AFFECT QUALITY LEVEL.
- 7 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCES.
- ⑧ SOLDERING LEAD OF MF CONTACT A SPLITS INTO TWO POLES.  
BE SURE TO CONNECT TO THE SAME CIRCUIT.

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS	
3	PHOSPHOR BRONZE		CONTACT AREA:GOLD 0.1 μm	7	POLYIMIDE			
			LEAD AREA:TIN-PLATING 1 μm			6	POLYESTER	(EMBOSSED COVER TAPE)
			UNDER PLATING:NICKEL 1.3 μm					
2	PHOSPHOR BRONZE		CONTACT AREA:GOLD 0.1 μm	5	POLYSTYRENE		(EMBOSSED CARRIER TAPE)	
			LEAD AREA:GOLD 0.03 μm			4	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1 μm
			UNDER PLATING:NICKEL 1.3 μm					LEAD AREA:TIN-PLATING 1 μm
1	POLYAMIDE	BLACK	UL94V-0				UNDER PLATING:NICKEL 1.3 μm	

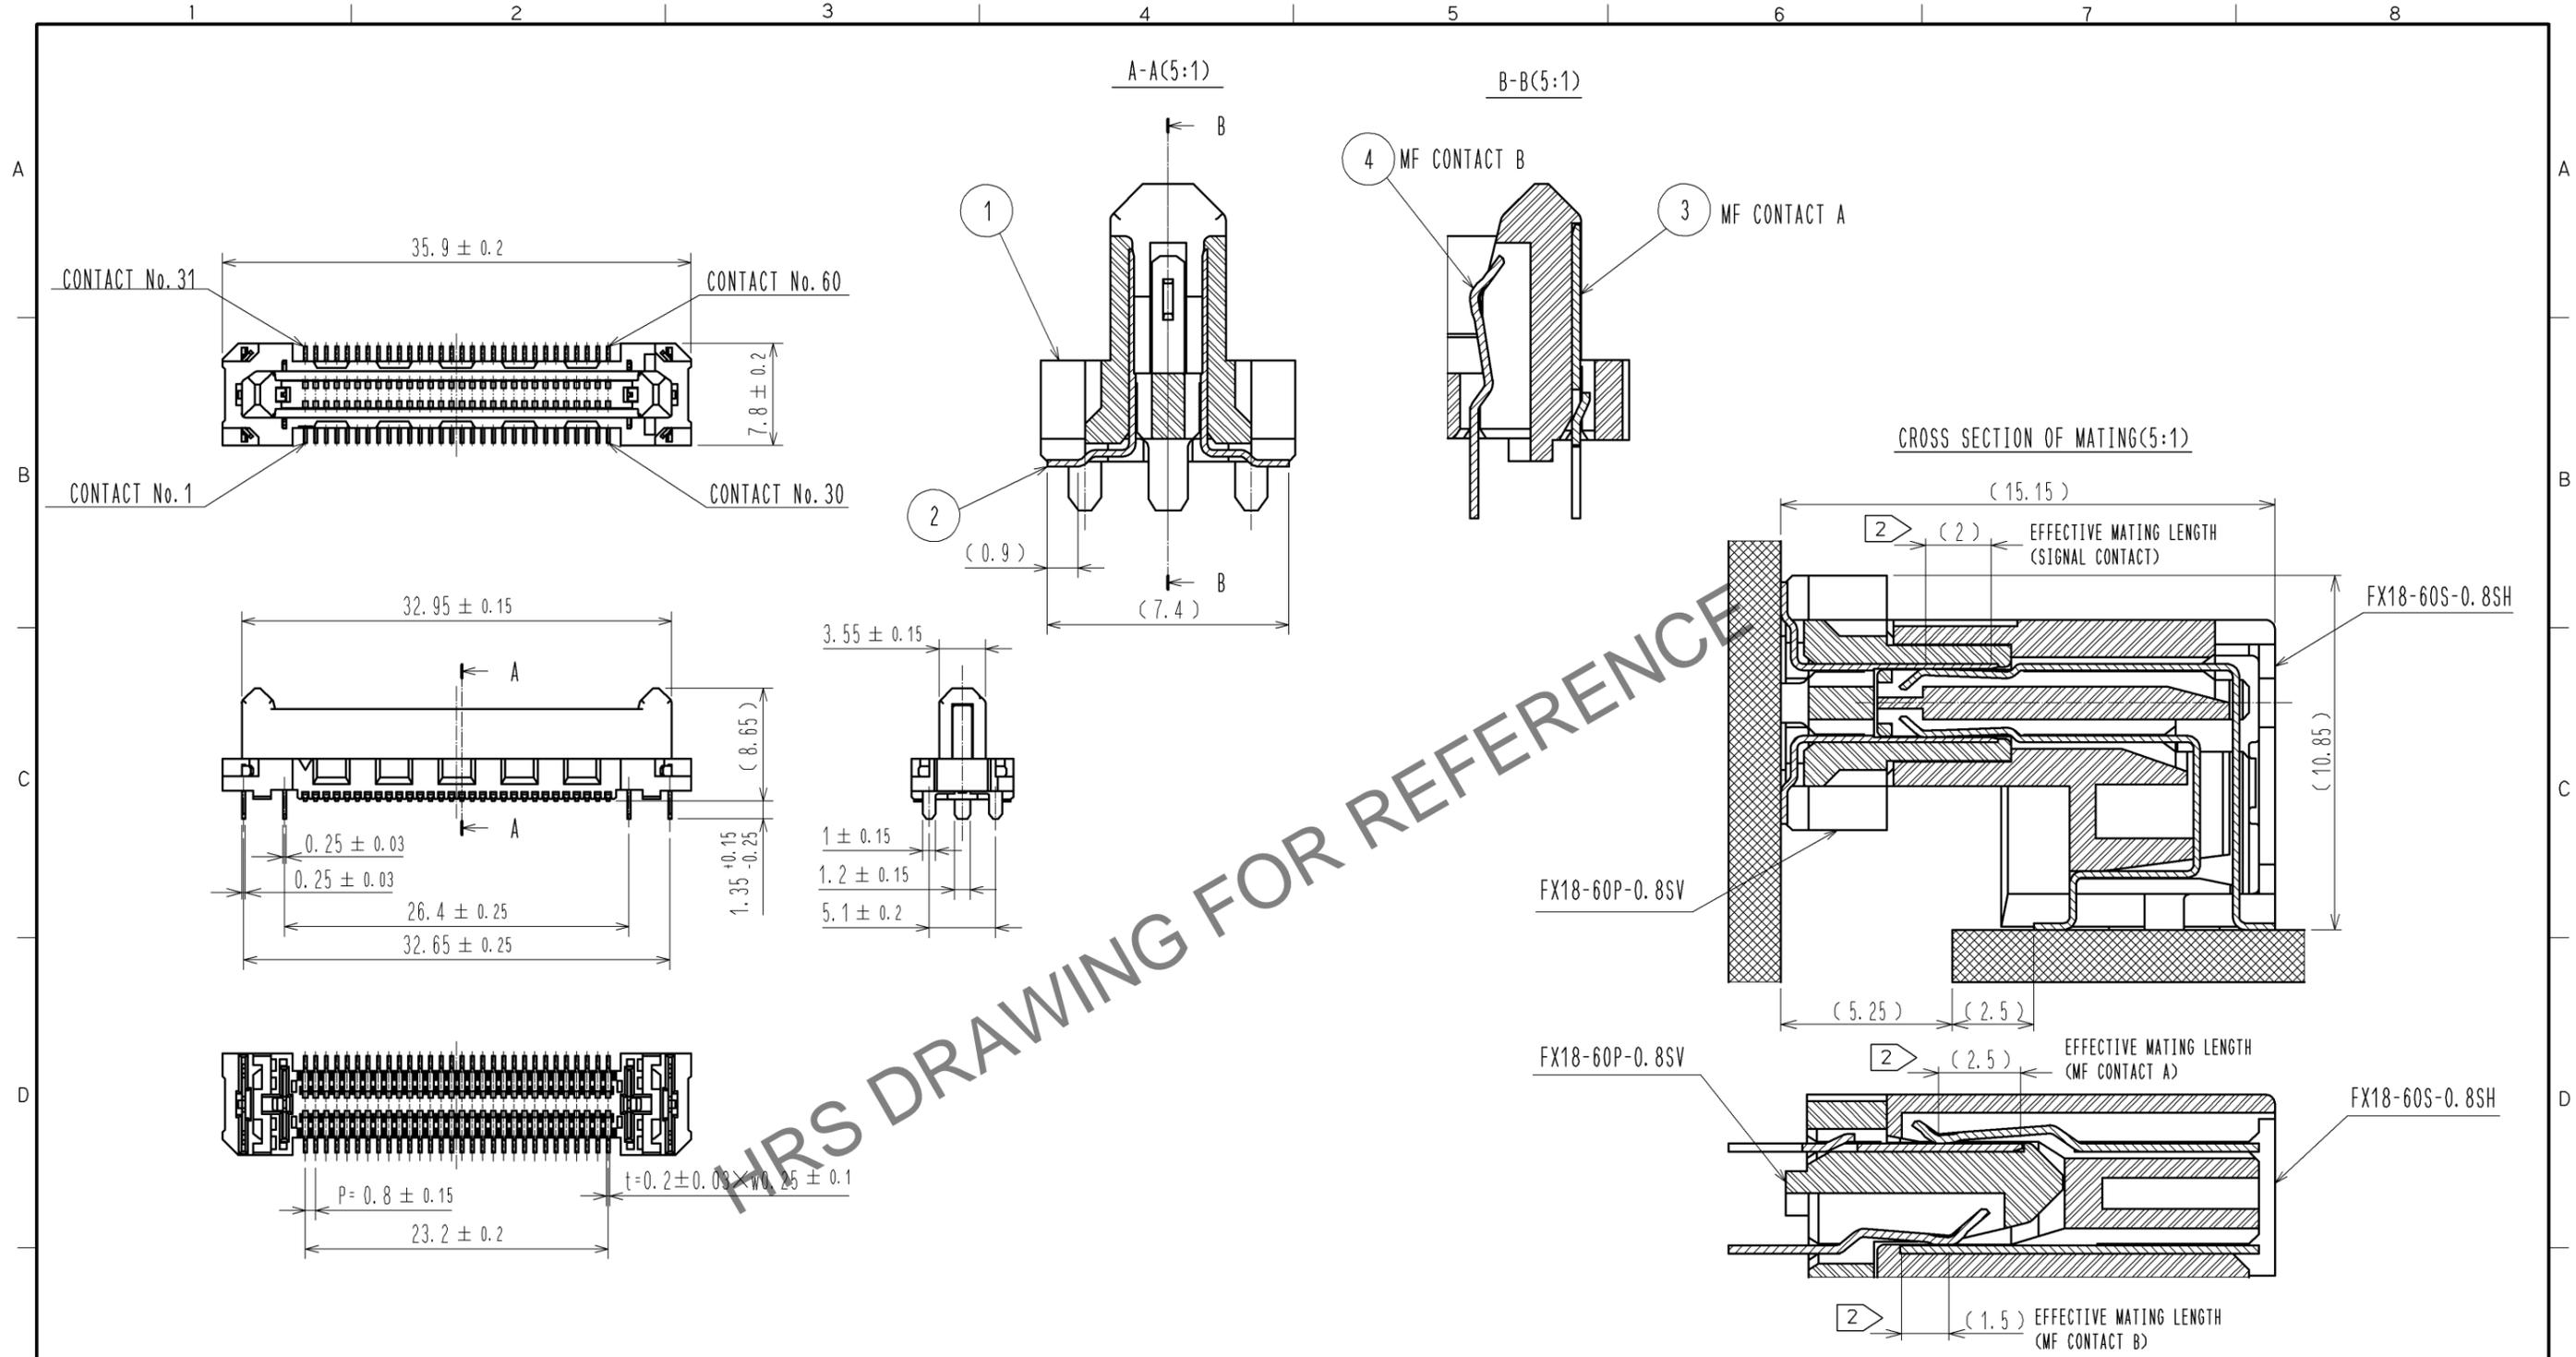
  

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	4	DIS-F-005578	TH. SANO	KI. HIROKAWA	11.07.21

APPROVED	CHECED	DESIGNED	DRAWN	DRAWING NO.	PART NO.	CODE NO.
HS. OKAWA	KI. HIROKAWA	TH. SANO	TH. SANO	EDC3-159561-02	FX18-60P-0.8SV(11)	CL579-0017-2-11
10.05.10	10.05.10	10.05.10	10.05.10			

Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

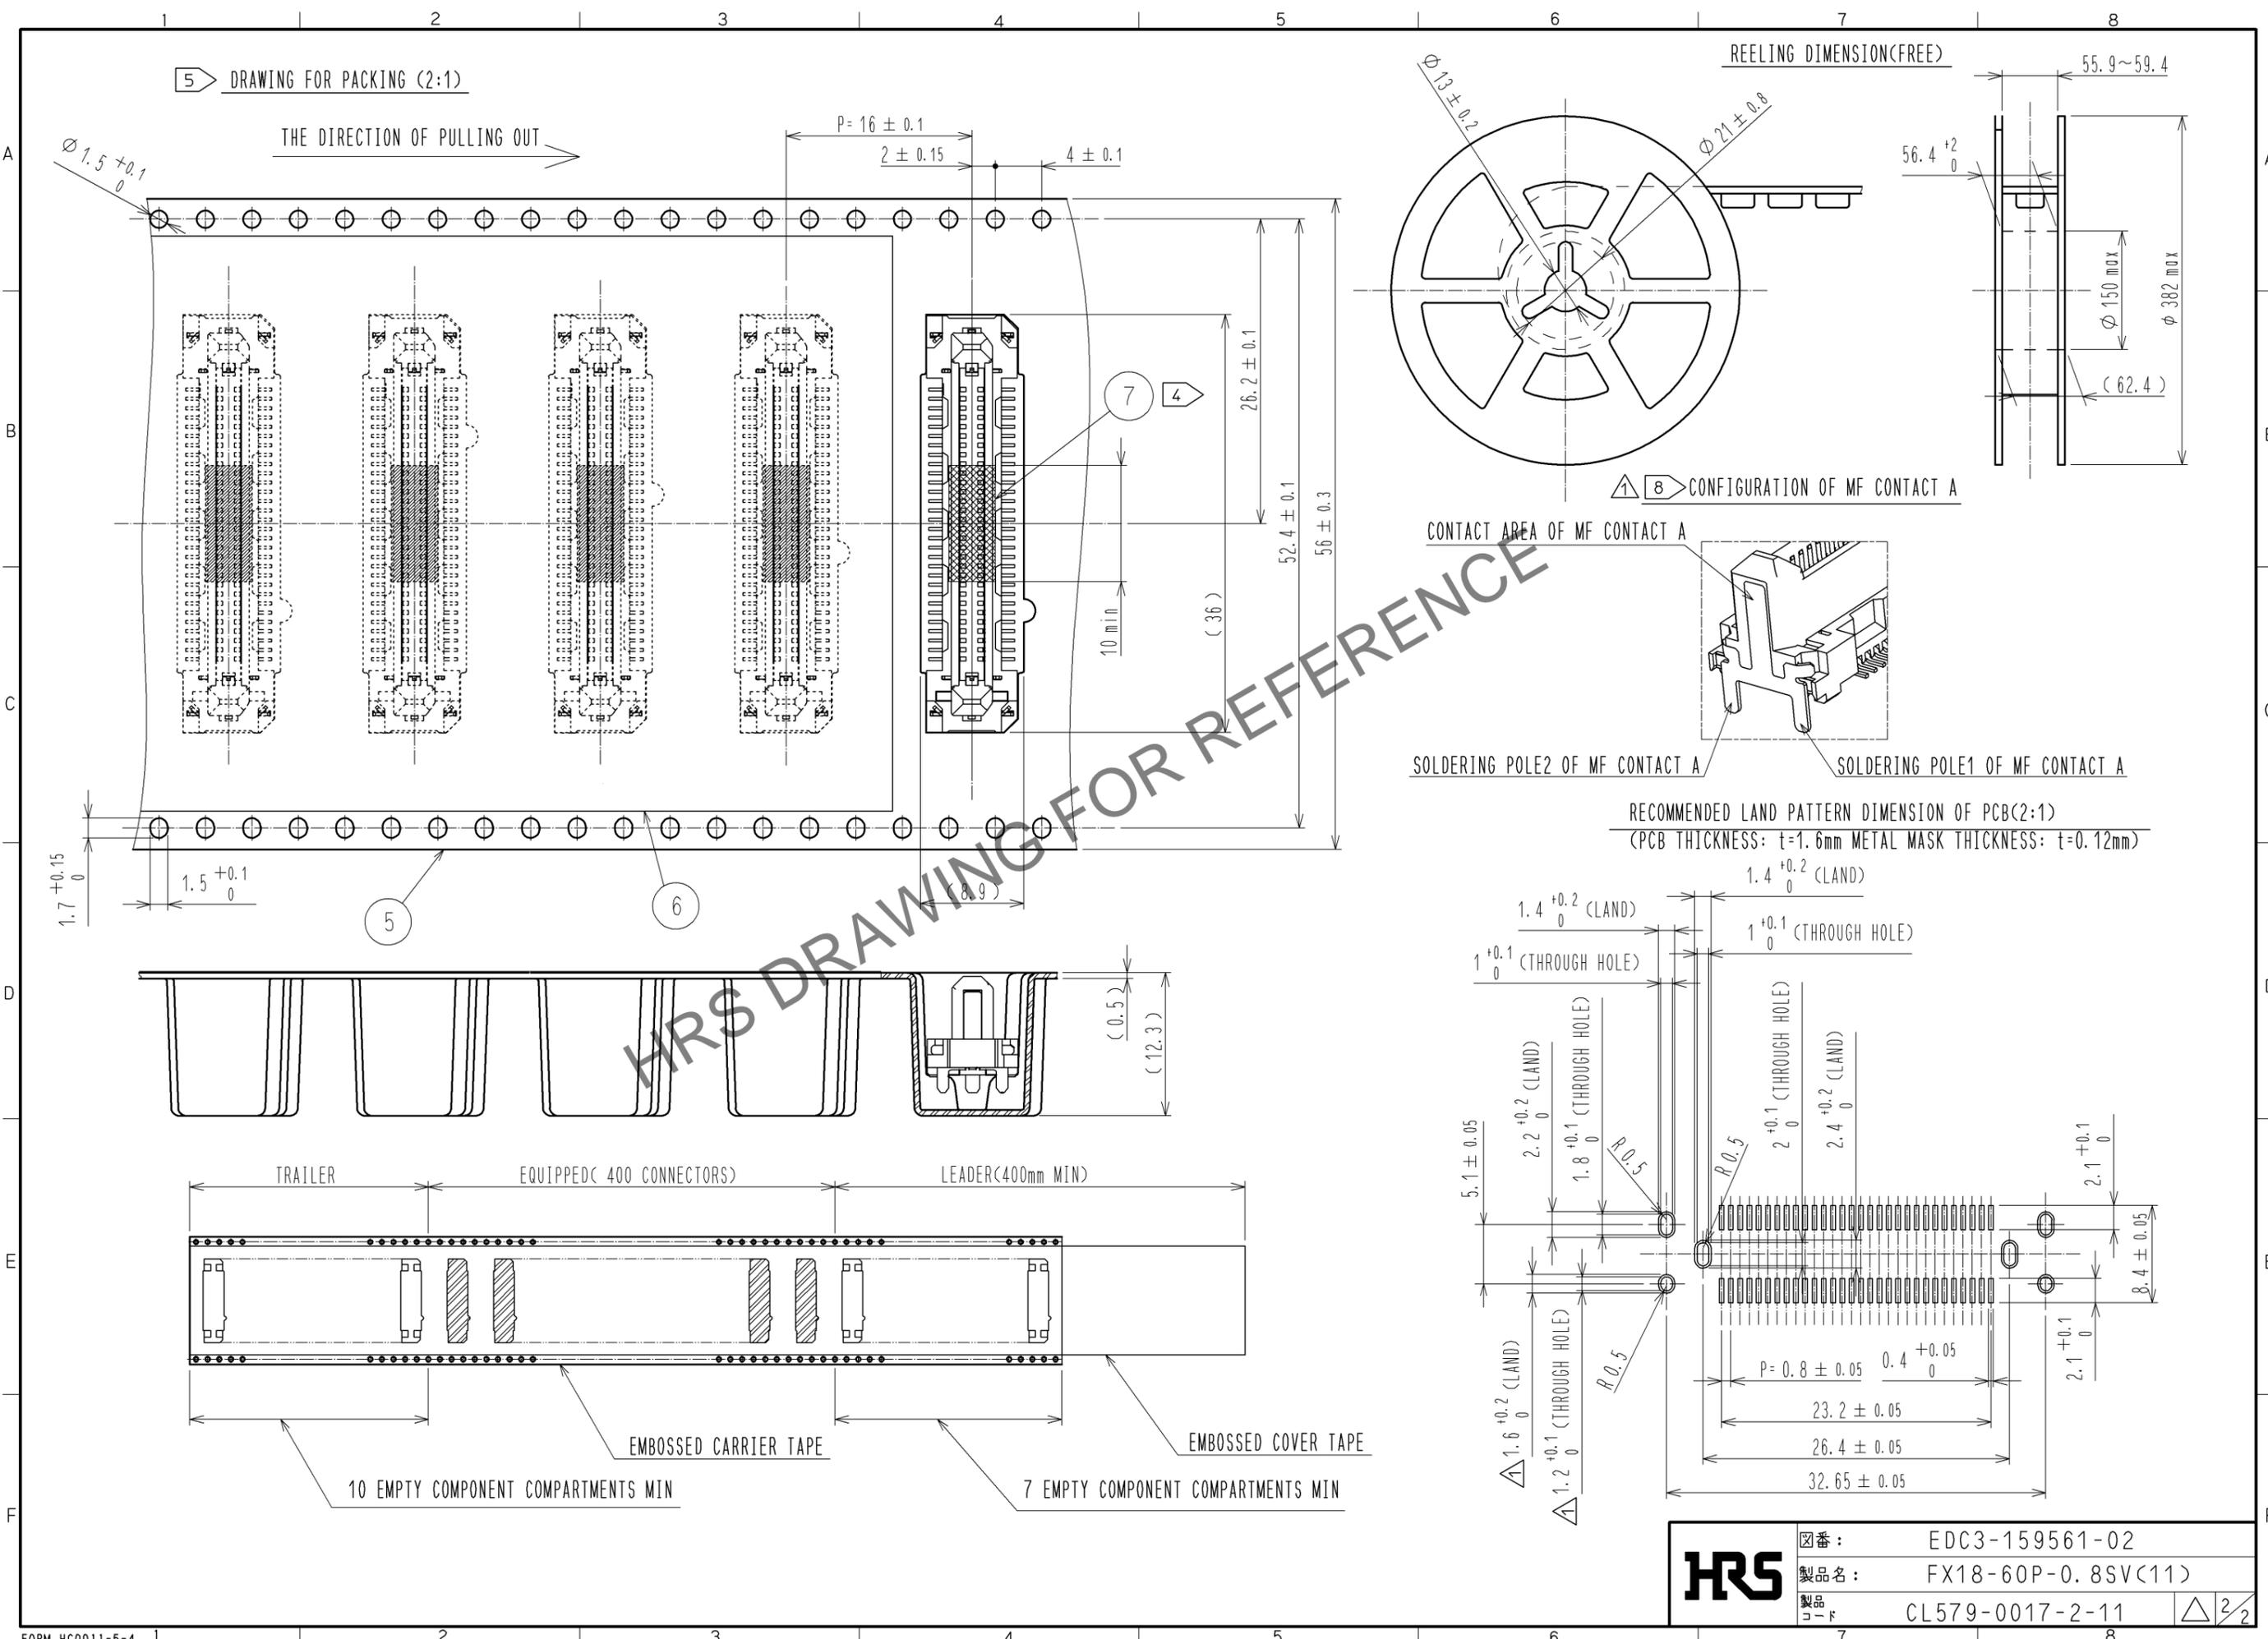

<b>HRS</b>	図番:	EDC3-159561-02	2/2
	製品名:	FX18-60P-0.8SV(11)	
	製品コード:	CL579-0017-2-11	